
KOYOE

Applicable to C&I Energy Storage Scenarios

30-50kW-121kWh Distributed Photovoltaic Energy Storage Hybrid System

Product Models

- KYT30kW-121kWh-A
- KYT40kW-121kWh-A
- KYT50kW-121kWh-A

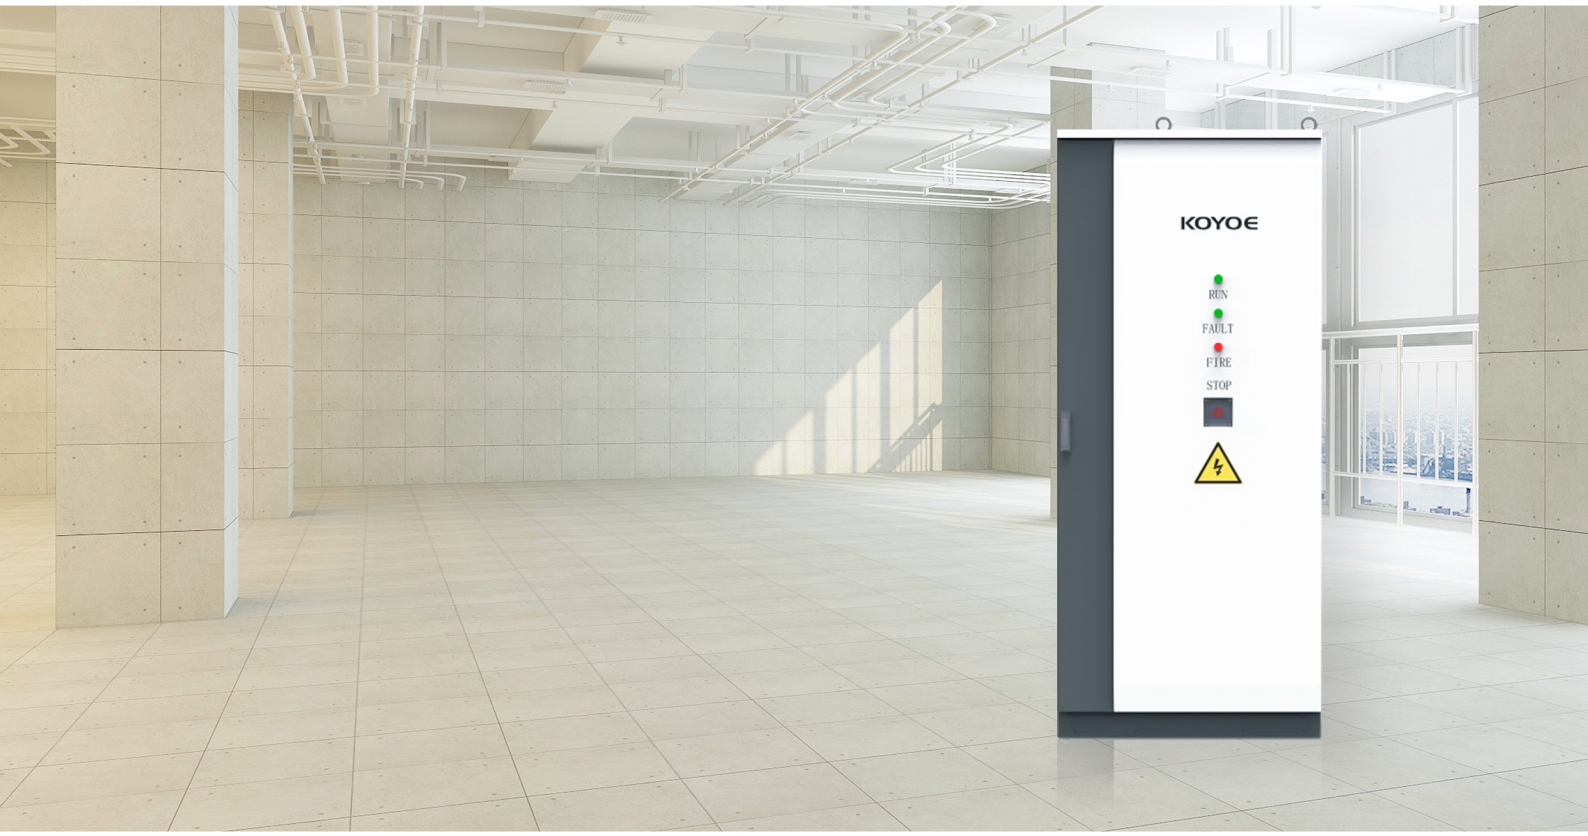

Plug-in Installation

Easy installation
labor saving

Four-Level Fire Protection

Accurate monitoring to prevent problems
Multiple barriers, solid protection

Support Diesel Engine

Optimize resource allocation Enhance power supply reliability

Multiple Systems in Parallel

Up to 40 units can be connected in parallel

*Requires parallel collectors (under grid connected condition)

Jiangsu Koyoe Energy Technology Co., Ltd.

No. 40, Wangwu Road, Wuzhong District, Suzhou, Jiangsu Province, China | +86 400-900-9536 | www.koyoe.com | info@koyoe.com

*Specifications are subject to the actual nameplate of the product

Model	KYT30kW-121kWh-A	KYT40kW-121kWh-A	KYT50kW-121kWh-A
PV Input Data			
Max. Input Power[W]	51000	68000	85000
Max. Input Voltage[V]		1000	
Operating Voltage Range[V]		180~900	
Max. Input Current[A]		36/36/36	36/36/36/36
Max. Short Circuit Current[A]		42/42/42	42/42/42/42
Number of MPPT Trackers		3	4
Number of Strings per MPPT		2/2/2	2/2/2/2
MPPT tracking efficiency [%]		99.99	
AC Output Data(On-grid)			
Nominal Output Power[W]	30000	40000	50000
Max. Apparent Output Power [VA]	33000	44000	55000
Max Input Power[W]		60000	
Nominal Output Voltage[Vac]		380/400V,3L/N/PE	
Nominal Output Frequency[Hz]		50/60	
Max. Output Current[A]	47	63	79
Max. Three-phase Unbalanced Output Current[A]	47	63	79
Power grid bypass current (A)		87	
Power Factor		~1(0.8 lead to 0.8 lag can be set)	
Total Harmonic Distortion[%]		<3	
AC Data(Off-grid)			
Nominal Output Power[W]	30000	40000	50000
Max. Apparent Output Power [VA]	33000	44000	55000
Nominal Output Voltage[Vac]		380/400V,3L/N/PE	
Nominal Output Frequency[Hz]		50/60	
Max. Three-phase Unbalanced Output Current[A]	47	63	79
Max. Output Single-phase Apparent Power[VA]	11000	14600	18000
Peak Output Apparent Power[VA](60s)	36000	48000	60000
Peak Output Apparent Power[VA](10s)	40000	60000	75000
On/Off grid switching time [ms]		<10	
AC Data(Diesel Gen.)			
Nominal Voltage[Vac]		380/400V,3L/N/PE	
Nominal Frequency[Hz]		50/60	
Nominal Input Apparent Power[VA]		60000	
Efficiency			
Efficiency of System [%]		88（0.5C charge & discharge @25±2℃）	
Battery Data			
Battery type		LFP	
Nominal Voltage[V]		384	
Working voltage range[V]		336~438	
Battery model		KY-64V314AH	
Max. Charge/Discharge Power[W]	30000	40000	50000
Cycle		cell ≥8000 cycles， 25±2℃，0.5C，90%DOD，70%EOL	
Nominal Charge/Discharge Current[A]	78/78	104/104	130/130
Number of Batteries		6	
Single Battery Capacity[kWh]		20.09	
Nominal Capacity[kWh]		121	
90%DODAvailable Capacity[kWh]		108.9	
Temperature Control System			
Temperature Control System		Intelligent air conditioning	
Fire Fighting System			
Active		Detector+Condensed aerosol fire extinguishing device+Water Fire Protection	
Passive		Condensed aerosol fire extinguishing device	
Explosion-proof		Passive presure explosion-proof valve	
General Data			
Operating Temperature Range[℃]		-20~50（>45 derating）	
Altitude[m]		<2000	
Ingress Protection Rating		IP54	
Relative Humidity[%]		0~95，No condensation	
Dimension(W*H*D)[mm]		942*1274*2188	
Weight [kg]		1400	
Certification			
Safety Standards		EN 62109-1/-2	
EMC Standards		IEC/EN 61000-6-1/-2/-3/-4	
On-grid Standard		CEI 0-21,NRS097-2-1:2017,VDE-AR-N 4105:2018，CQC 3310-2014	

*Specifications are subject to the actual nameplate of the product